


# KINGS POINT MACHINERY

## SCUPPER VALVES


Furnished with or without manual control. Control assembly includes open/closed indicator. Flanges are ASA 150 lb. flat faced, supplied blank unless drilling is specified. Flanges can also be finished to Mil-F-20042 (Navy).

180°-1018 Series

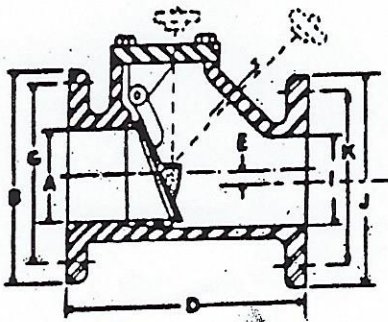

Body	Bronze or Steel*
Flap, Seat	Bronze
Hinge Pin	Monel
Control Stem	Brass, Cres or Monel
Cover, Bonnet, Open/Closed In- dicator, Handwheel, Cleanout Plug	Bronze
Cover Gasket	Neoprene
Cap Screws	Silicon Bronze

90°-1018 Series

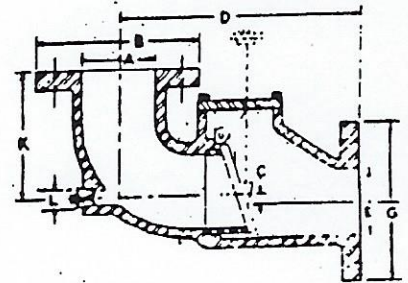

Outlet Same Size as Inlet

	Dimensions--Inches							
A & I Dia.	2	2-1/2	3	4	5	6	8	
B & J Dia.	6	7	7-1/2	9	10	11	13-1/2	
D	8	9-1/2	9-1/2	10-1/2	14	15	16	
E	3/8	9/16	9/16	9/16	5/8	3/4	1	
G & K Dia.	4-3/4	5-1/2	6	7-1/2	8-1/2	9-1/2	11-3/4	

Outlet Same Size as Inlet

	Dimensions--Inches				
A & E Dia.	2-1/2	3	4	5	6
B & G Dia.	7	7-1/2	9	10	11
C	1/2	1/2	1/2	5/8	1
D	12	12	12-7/8	14-3/4	18
K	5-3/8	5-3/8	6-1/8	6-3/4	8-5/16
L	1-1/4	1-1/4	1-1/2	1-1/2	1-1/2

Outlet Larger Than Inlet

A Dia.	2	2-1/2	3	4	5	6	8
B Dia.	6	7	7-1/2	9	10	11	13-1/2
D	8-1/4	8-3/4	8-3/4	9-3/4	11	12	13-1/2
E	0	0	0	0	0	0	0
G Dia.	4-3/4	5-1/2	6	7-1/2	8-1/2	9-1/2	11-3/4
I Dia.*	3	4	4	5	6	8	10
J Dia.	7-1/2	9	9	10	11	13-1/2	16
K Dia.	6	7-1/2	7-1/2	8-1/2	9-1/2	11-3/4	14-1/4

Outlet Larger Than Inlet

A Dia.	2-1/2	3	4	5	6
B Dia.	7	7-1/2	9	10	11
C	0	0	0	0	0
D	10-1/8	10-1/8	11	12-1/4	15
E Dia.	4	4	5	6	8
G Dia.	9	9	10	11	13-1/2
K	5-3/8	5-3/8	6-1/8	6-3/4	8-15/16
L	1-1/4	1-1/4	1-1/2	1-1/2	1-1/2

KINGS POINT MACHINERY, INC.  
 9936 Gould Street  
 Oakland, CA 94603  
 (510) 638-2712  
 FAX (510) 638-3339